

## HYR Series

### HYR-4832

36 CH SET,  
960/480(PAL:800/400) display/recording




#### Key Features

- ✓ Full Features of PC DVR with IP supporting (Hybrid or NDVR features)
- ✓ Max 36ch, Analog 32ch + IP 4ch
- ✓ Real time display and 480 recording for 32ch (PC)
- ✓ Support 6 internal hard disks (IDE and S-ATA)
- ✓ Stable and seamless file system (Image DB basket 100MB)
- ✓ Excellent image quality and appropriate file size (Modified Mpeg-4)
- ✓ Synchronized live and recording with audio
- ✓ Live sound and 2 way audio
- ✓ Diverse PTZ device support and on-screen PTZ control
- ✓ Various backup mode : Schedule/Concurrent/Manual/Direct/AVI and Jpeg
- ✓ Various search mode : Smart, Time and date, spot search in live view (-30minutes)
- ✓ Universal IP products support (Axis, Vivotek, -Now available) Sony, Canon, JVC, Panasonic----Will be added..
- ✓ Transaction Data Control : POS, Access control, ATM
- ✓ Remote SW(NCMS)
  - Free Multiple DVRs control( Central Management SW)
  - Remote Live/Search/Setup/Spot recording (NCMS Lite)
  - Event Scenario and Control/E-map/Health Checking (NCMS Pro)
  - Dynamic IP support
  - Easy and Intuitive <Drag & Drop> function
  - Remote 2 way audio, Live Audio
  - Various events control : Popup/Border and event list control (DB)
- ✓ Web DVR (Internet Explorer)
  - Dynamic IP support/Direct web support
  - DIMS supplying to run Dynamic IP management Server for dealer

#### Specification


MODEL	HYR-4832
<b>GENERAL</b>	
Operation System	WIN XP,2000,Vista
Video Input	36 CH (32 plus 4 IP camera)
Video Output	1 XGA, 4 Composite (1CH Rotation), 4 Spot-out
Alarm Input	16
Alarm / Relay Output	4 Alarm / Relay Output
Audio Input	16 (default)+16 (option)
Loop-out	L-out 16 X 2 (option)
Control Device	Mouse, Keyboard, Virtual Keyboard
Archiving	USB (Stick, HDD, DVD), CD-RW, DVD-RW
PTZ Control	RS 422/485, USB serial converter
HDD (Option) : Internal	4 EA (max), each 250 GB ~ 1 TB
HDD (Option) : External	Yes
System Requirement (Default)	250GB HDD + DVD-RW
<b>DISPLAY</b>	
Codec	Modified MPEG 4
Resolution : NTSC	720 X 480 , 720 X 240 , 360 X 240
Resolution : PAL	720 X 576 , 720 X 288 , 360 X 288
Live Monitoring (NTSC/PAL)	Real Time
Live Screen Division	1,4,6,9,10,16,21,25,36
Live Digital Zoom	No
Recording FPS (NTSC/PAL)	480/400 @ CIF, 240/200 @ 2 CIF, 120/100 @ 4 CIF
Playback Screen Division	1,4,9,16
Playback Digital Zoom	Yes
<b>FUNCTION</b>	
Recording Modes	Continues / Motion / Sensor /Sensor &Motion / Continues & Event
Multi Language Support	Yes
POS/ATM Interface	Yes / Available on demand
Hybrid Support	Yes
Third-party Dome Protocols	Yes
Preset / Touring	Yes
Pre-Alarm	Yes, 1-5 seconds
Image Authentication	Yes
Raid Storage	Yes
<b>REMOTE</b>	
View Live / Playback	Yes
Remote Setup / PTZ Control	Yes / Yes
E-mail on Alarm	Yes
Web Browser	Live View / Search / PTZ
PDA Client	Yes
<b>MECHANICAL</b>	
Dimension (W X D X H), m/m	4U 19inch Rack type : 444X590X178 (560X630X300 Packing)
Weight (Shipping weight)	22 Kg
Approvals	CE, FCC, ROHS

#### External Dimension

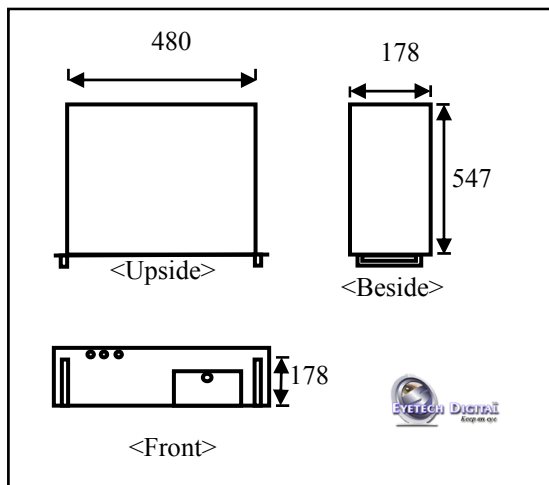

# HYBRID DVR

## System Configuration

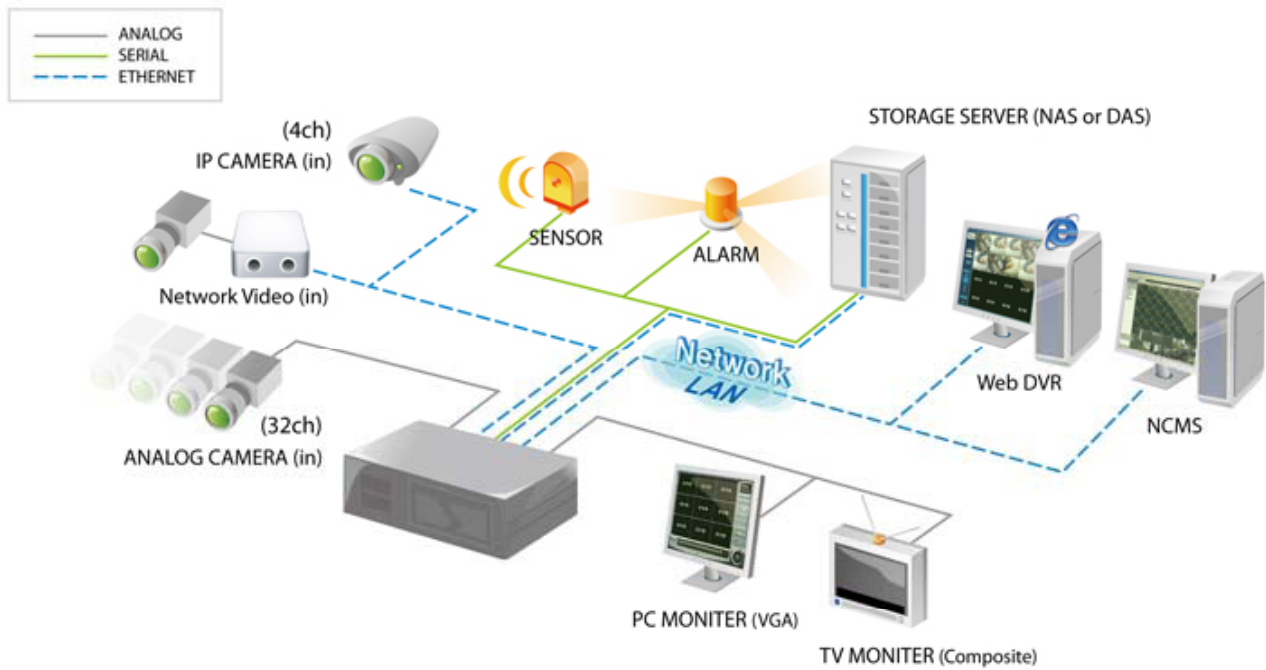


## Software Feature



<Live Monitoring>



<Playback Screen>

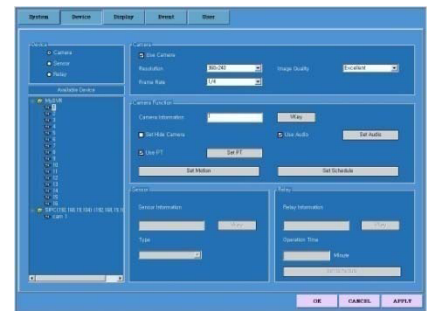

<Setup Mode>



<NCMS LITE/PRO>

live / Remote Search / Remote Setup.  
3<sup>rd</sup> Level E-map / Event Management.  
Spot Recording / On-Screen PTZ control.



<PDA Viewer>

Live View & PTZ control  
Will be available in 3<sup>rd</sup> Q .2008



<DTVS>

Data Transaction Verify  
➔ POS, ATM, Access controller  
Add-on package (Easy Install)



Phone: 909-989-1040

Fax: 909-941-3144

E-mail: sales@eyetechdigital.com

Website: eyetechdigital.com